REDIFON LTD
LONDON

TITLE R50 RECEIVER – BLUE SPOT

WD1/2719/L

SHEET Nº 1 CONT.

DRAWN DATE
CHECKED DATE
ENGINEER DATE
APPROVED DATE

ISSUE
1. 9. 8. 48.
R27 DELETED.
C30 WAS ·1µF.
C65/66/69/70 R36 REPOSITIONED.
L40/41 C155/156/157/158 C159 ADDED.
SCREENING ADDED TO LEAD PL1 PIN 10
CH/N 4609/L
2. 10 3 49
C22 (IN PARALLEL WITH TR8) DELETED.
CH/N. 4694/L.
3. 22. 4. 49.
CIRCUIT MODIFIED TO SUIT BLUE SPOT RECEIVER.
CH/N. 4958/L.
4. 17. 11. 49
PLUG AND SOCKET RENAMED
5. 19-1-50.
R1G (ACROSS TM5) DELETED.
CH/N. 5137/L
6. 14. 4. 50.

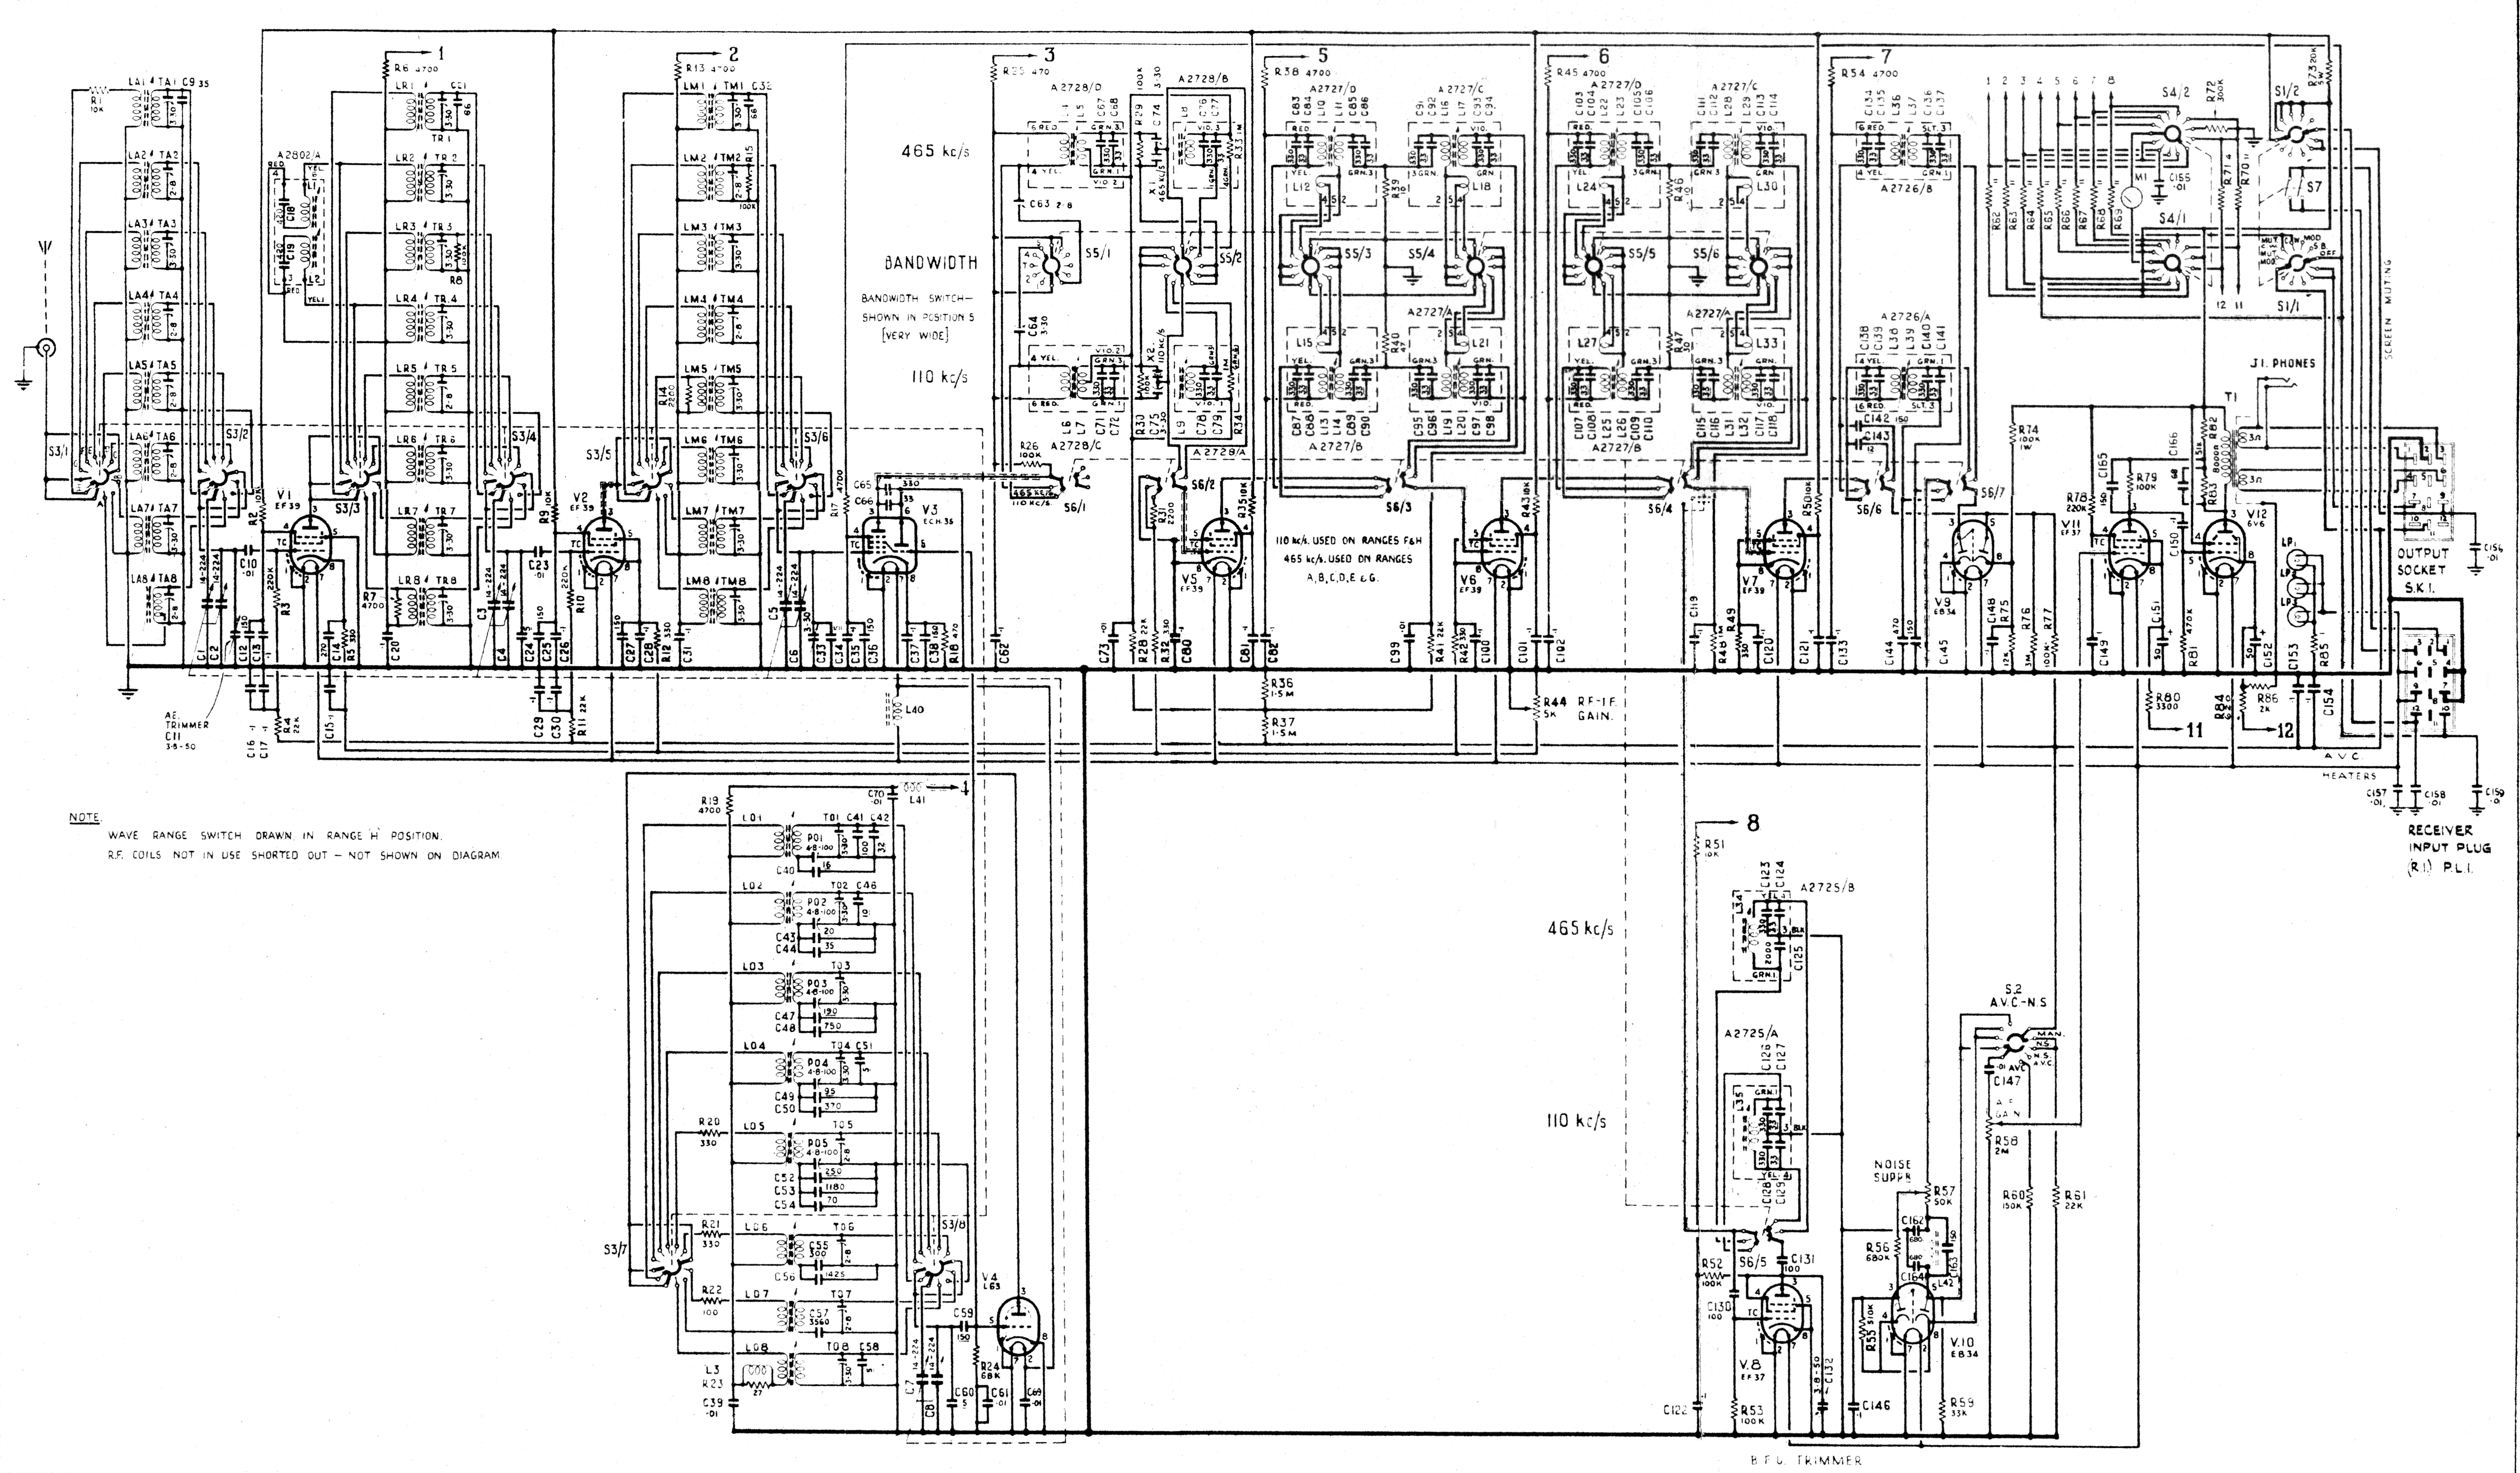

465 kc/s
BANDWIDTH
BANDWIDTH SWITCH— SHOWN IN POSITION 5 [VERY WIDE]
110 kc/s
110 kc/s. USED ON RANGES F&H
465 kc/s. USED ON RANGES A, B, C, D, E & G.
V1 EF39
V2 EF39
V3 ECH35
V4 L63
V5 EF39
V6 EF39
V7 EF39
V8 EF37
V9 EB34
V10 EB34
V11 EF37
V12 6V6
AE. TRIMMER C11 3·5-50
R44 5K RF-I.F. GAIN.
A.V.C.
HEATERS
J1. PHONES
OUTPUT SOCKET S.K.1.
RECEIVER INPUT PLUG (R1) PL1.
SCREEN MUTING
S2 A.V.C.-N.S
A.F. GAIN
NOISE SUPPR.
B.F.O. TRIMMER

NOTE.
WAVE RANGE SWITCH DRAWN IN RANGE 'H' POSITION.
R.F. COILS NOT IN USE SHORTED OUT – NOT SHOWN ON DIAGRAM.